

# DCT350P

BATTERY-POWERED ELECTRIC VEHICLE ON CRAWLERS  
WITH RADIO REMOTE CONTROL **FOR LOADS UP TO 450 KG\***

ZERO EMISSIONS

QUIET

LOW MAINTENANCE



**Designed to meet  
challenging ground  
condition**



**Compact**



**Remote control for  
the highest safety  
standards**




**Set up for different  
accessory types**

  
MADE IN ITALY


The DCT-350 is a crawler carrier designed to cope with difficult ground conditions and it is extremely effective in building sites and indoors, in tunnels or underground and in places where tracked traction and zero emission are essential. It is suitable for confined spaces since it is compact and it can turn on itself. The driving system employed in the DCT-350 is the radio remote control, which ensures the highest safety standards. Equipped, with special motors and drivers, it allows the best benefits during the work and grants bigger autonomy (product image with 220 lt. skip and hydraulic tipping, not included in the basic version).

**ALITRAK**<sup>®</sup>  
ELECTRIC MINDED

[www.alitrak.com](http://www.alitrak.com)



790 mm

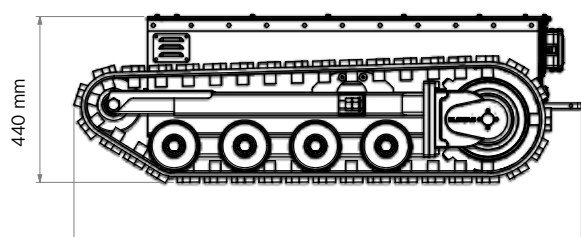

440 mm


1342 mm

### FEATURES

Equipment body	<b>On crawlers</b>
Driving control type	<b>Radio Remote control</b>
Accelerator	<b>2 Joystick</b>
Battery charger	<b>External, 15 A High Frequency, with charge status information</b>
Dashboard display	<b>Remaining battery charge Equipment failures Hour meter</b>
Parking brake	<b>Electromagnetic</b>
AGM batteries	<b>4 x 12V/85 Ah C20</b>
Electric motor	<b>2 x 48V/1500 watt BL AC S2 60 min.</b>
Operational indicator	<b>Flashing light</b>
Product net weight	<b>377 kg abt</b>

### PERFORMANCE

Loading capacity on flat surface*	<b>450 kg</b>
Max gradient*	<b>30%</b>
Max lateral gradient *	<b>20%</b>
Forward speed	
Fast	<b>3,5 Km/h abt</b>
Slow	<b>1,6 Km/h abt</b>
Reverse speed	
Fast	<b>3,5 Km/h abt</b>
Slow	<b>1,6 Km/h abt</b>
Battery recharging time	<b>8 hours abt</b>



\*The loading capacity is an indication that can change depending on the type of surface, on the slope degree and on the working time of the machine.

Features shown are subject to change without notice

### ACCESSORIES



Support frame    Sided flatbed with support frame    220 lt. skip with Hydraulic pump    Wired control    Brake release    Different Battery types



UniForce Distribution Inc.  
 Tel : (866) 889-1272  
 Courriel : [info@uniforcedistribution.com](mailto:info@uniforcedistribution.com)  
 Web : [www.uniforcedistribution.com](http://www.uniforcedistribution.com)